



Units:

AS 80
AS 160
AS 200
AC 400
AC 800

Equipment:

aquabox*
rollermax*
waschbox*
waschplatz*

to clean off:


pumps
container
paint roller
flow coater
tools
printing machine

products

biocide
antifoaming agent
cleaner/ purifier
floculator
odor control
seperating agent

To recycle waste water from:

Latex paint
Flexo print
adhesives
oily emulsions
water lacquer
bonding agent

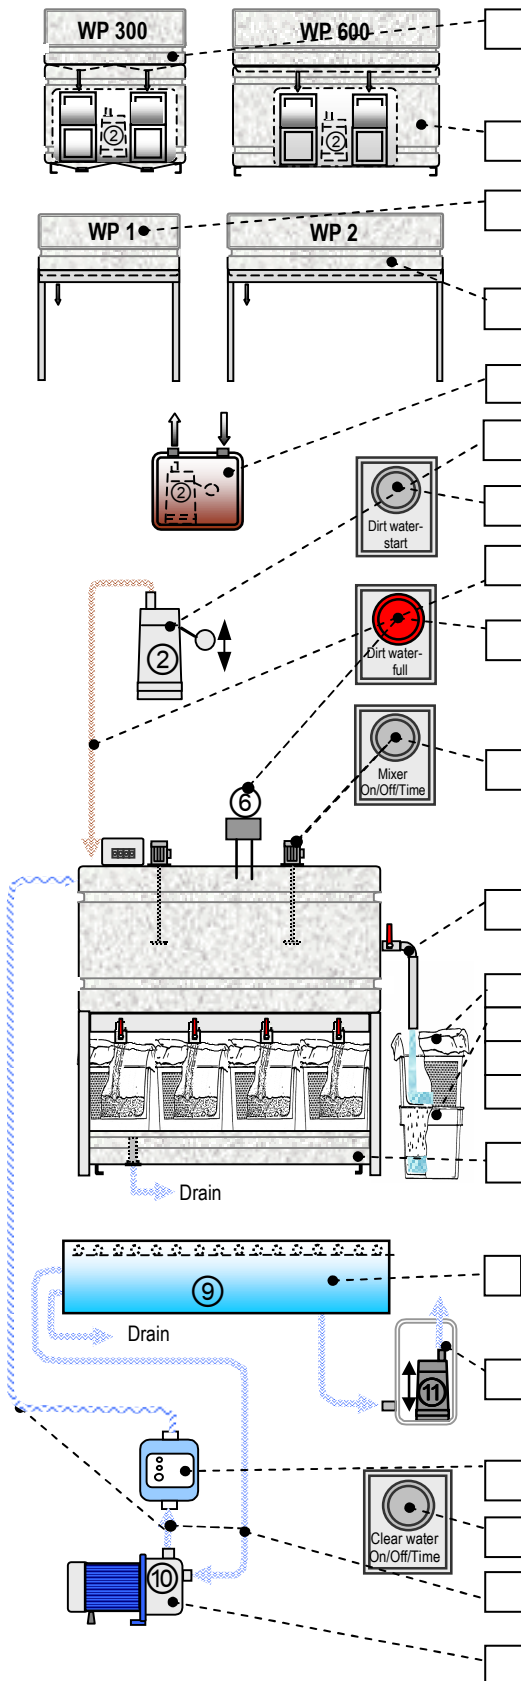

waschplatz* WP 300, width approx. 900 mm
volume of dirty water container: approx. 300 l
with 2 removable containers

waschplatz* WP 600, width approx. 1.700 mm
volume of dirty water container approx. 600 l
with 2 removable containers

waschplatz* WP 1, width approx. 900 mm
with top, INOX

waschplatz* WP 2, width approx. 1.700 mm
with top, INOX

Temp. Container for niropump*

niropump*

dirt water- submerged pump to fill up

niropump* control box

niropump* compl. assembled
with bayonet-socket and approx. 3 m water hose

nivomax* N

control pad to turn off the dirt water-
submerged pump with full containers

AC 800 Standard

Working batch volume approx. 800 l
4 drain outlets- ball valve 1 1/4"
2 time controlled mixers approx. 0,12 KW

Clear water outlet additional assembled
With a ball valve, applicable according to specs.

aquabox* d

aquabox* g

feinstfilter* grey

filtersack* white

clear water tank* 180

4 x aquabox*, drain to sewage system (standard)

alternative:

Tank collect clear*- modul 200

With a castor rink L=1.650 mm for 4 x
aquabox*. Drain to sewage system (standard)

filtrate-hoist* integrated float-switch

Reflux valve, bayonet socket

Pass on sewage system

clearpump* pressure - controller

clearpump* time - controller

clearpump* completely assembled

with bayonet socket and approx. 3 m water hose

clearpump* INOX

clear water pump 4 bar, for reuse of the
processed water